


RoHS PASS

REV	ECN NO	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			NEW RELEASED	09/10'12	yangliu

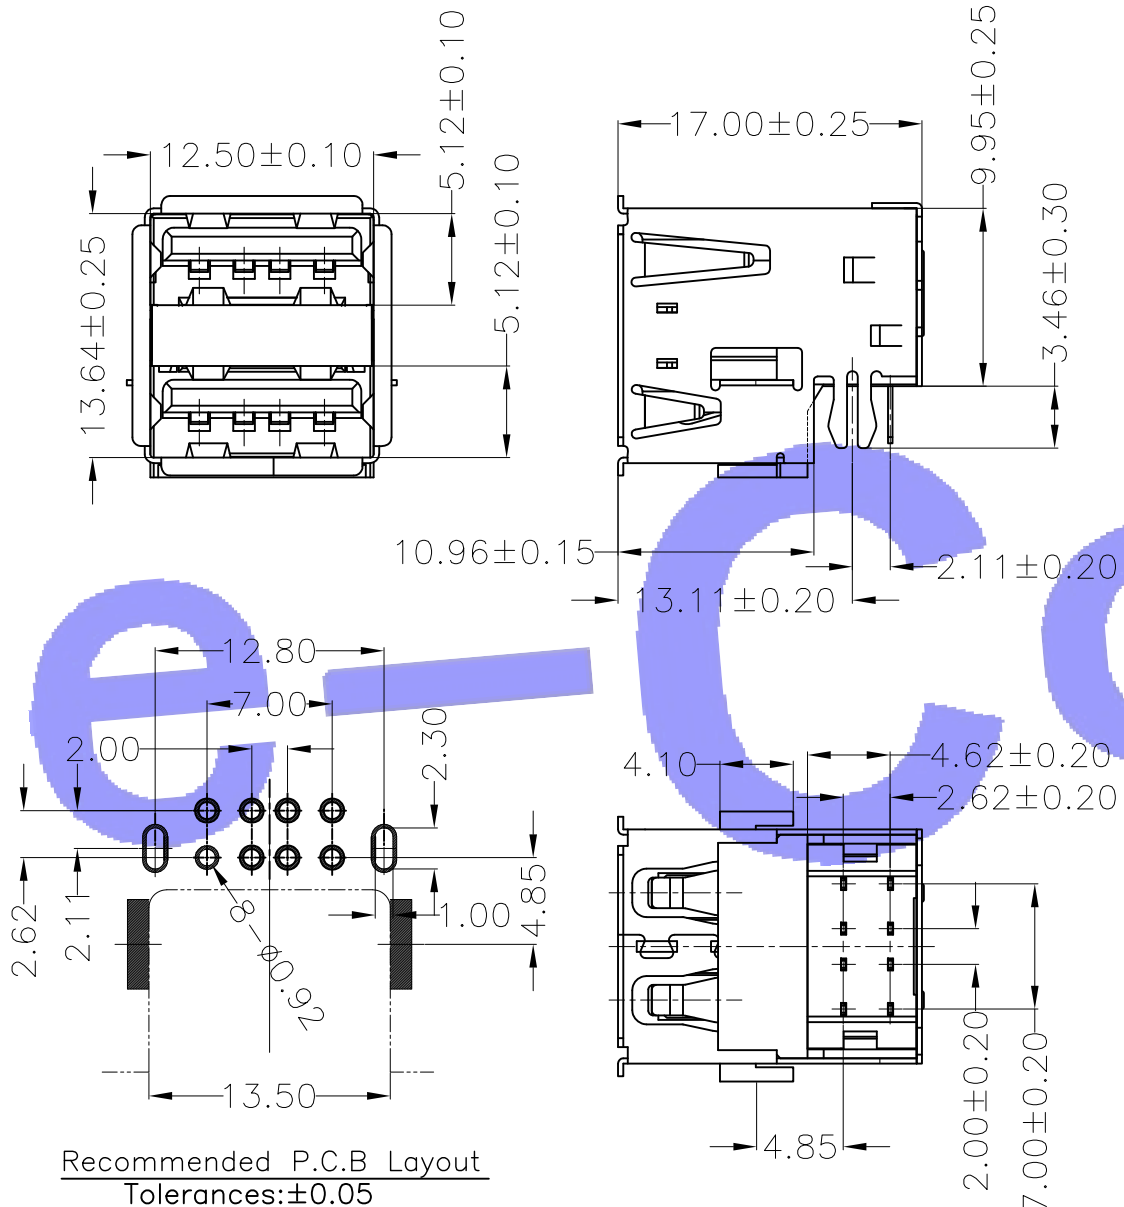

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1.5 Amperes.
 Dielectric Withstanding Voltage: AC 500 V r.m.s.
 Insulation Resistance: 1000 Megohms Minimum at DC 500V.
 Contact Resistance: 30 Milliohms Maximum.
 Operating Temperature: -55°C~85°C.

MATERIALS:

Contacts: Copper Alloy.
 Insulator: PBT+Glass Fiber, UL 94V-0 Rated.
 Up Shell: Copper Alloy.
 Back Shell: SPCC.
 Shell In EMI: Copper Alloy.

USBX-D8FX-XXR0-55

5-ROHS

Contact Finish:

- 1-Gold Flash
- 3-Selective Gold 5u"
- 5-Selective Gold 15u"
- 7-Selective Gold 30u"

Shell Finish:
 N-Nickelage
 T-Tinning
 G-Gold Plated

Contact Finish:
 K-Black
 W-White

e-Conn 苏州正耀电子有限公司
 ELECTRONIC(SU-ZHOU) CO., LTD

DRAW NO:	DATE	MATERIAL: SEE NOTE 1	DRAW NAME:
DESIGN:		FINISH: /	USB A TYPE FEMALE
CHECK:		FILE: /	90° DIP TWO SHRAPNEL
REVIEW:		P/N NO: USBX-D8FX-XXR0-55	MODEL:
APPROVED:		REV: AO SCALE: N/A	UNIT: mm SHEET 1/1

DIM	TOL	DEC	TOL
X.	±1.0	X.'	±1"
X.X	±0.38	X.X'	±0.5"
X.XX	±0.25	X.XX'	
X.XXX	±0.10	X.XXX'	